


# NP-7.5 BREATHING AIR COMPRESSOR

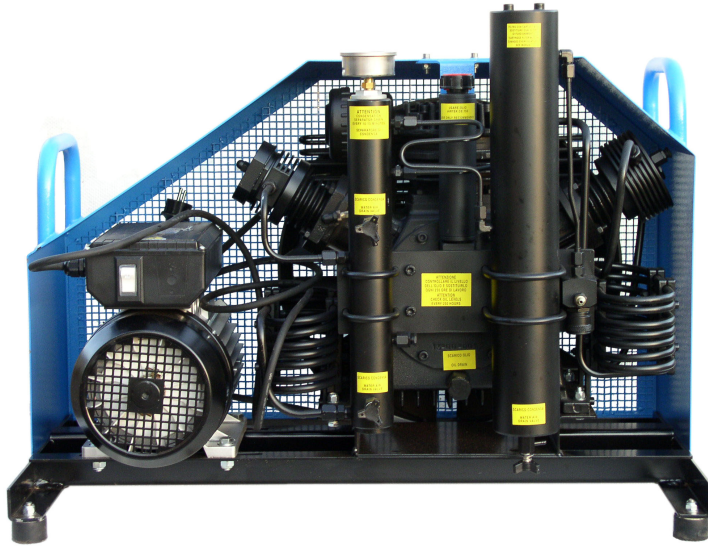

- ❖ 9 CFM
- ❖ 5000 PSI
- ❖ 7.5 HP
- ❖ Single or Three phase electric
- ❖ 25" W x 17.8" L x 33.4" H
- ❖ 230 lbs.

## SPECIFICATIONS

### COMPRESSOR

The compressor block is 3 stage, air cooled, has intercoolers and aftercooler, relief valves on all stages, and a multi-blade fly wheel to provide high velocity cooling over the compressor. The compressor comes with a magnetic starter, stop/start switch and an hour meter as standard equipment. Automatic drain system and high-pressure shut down are optional.

### PURIFICATION

An 11,550 Cu. Ft. filtration system is designed to operate at 5000-PSI working pressure with a 4:1 safety factor. The system uses a dryer bed to remove water in excess of dew point -65 degrees. (NFPA 1500 standard) Activated charcoal and a carbon monoxide catalyst remove remaining contaminants to provide CGA Grade "E" breathing air. Additional filtration capacity can be added for high volume users.

### ELECTRICAL REQUIREMENTS

A magnetic starter is included.

The compressor requires a minimum 40 Amp, 230 Volt connection for single-phase operation, and 30 AMP, 230 or 208 Volt connection for three-phase operation.

### North Shore Compressor & Machine, Inc

83 Outer Drive, Silver Bay, MN 55614 (218) 226-4695 Voice (218)-226-3440 Fax  
[www.northshorecompressor.com](http://www.northshorecompressor.com), email: [info@northshorecompressor.com](mailto:info@northshorecompressor.com)