


NP-G Air Compressor

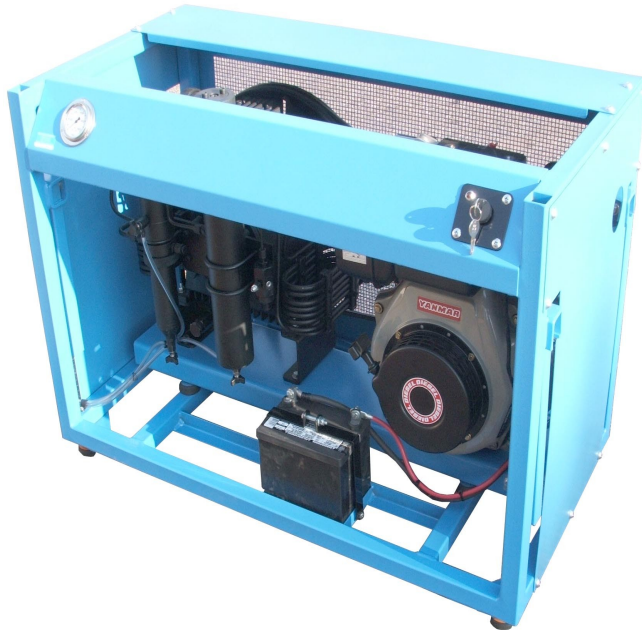

- ❖ 6 or 9 CFM
- ❖ 5000 PSI
- ❖ 6.5 or 9 HP
- ❖ 42" W x 24" D
x 36" H
- ❖ Approx. 350 lbs.

SPECIFICATIONS **COMPRESSOR**

The compressor block is 3 stage, air cooled, has intercoolers and aftercooler, relief valves on all stages, and a multi-blade fly wheel to provide high velocity cooling over the compressor. The compressor has manual drains for condensate.

PURIFICATION

An 8,000 Cu. Ft. filtration system is designed to operate at 5000-PSI working pressure with a 4:1 safety factor. The system uses a dryer bed to remove water in excess of dew point -65 degrees. (NFPA 1500 standard) Activated charcoal and a carbon monoxide catalyst remove remaining contaminants to provide CGA Grade "E" breathing air. Additional filtration capacity can be added for high volume users.

GASOLINE DRIVEN

This unit is driven by a 6.5 or 9 horse power Honda engine.
An upgrade to diesel is available.
(Pictured with diesel engine)

North Shore Compressor & Machine, Inc

83 Outer Drive, Silver Bay, MN 55614 (218) 226-4695

www.northshorecompressor.com,

(218)-226-3440 Fax

email: info@northshorecompressor.com