




03-7.5-A BREATHING AIR **COMPRESSOR**

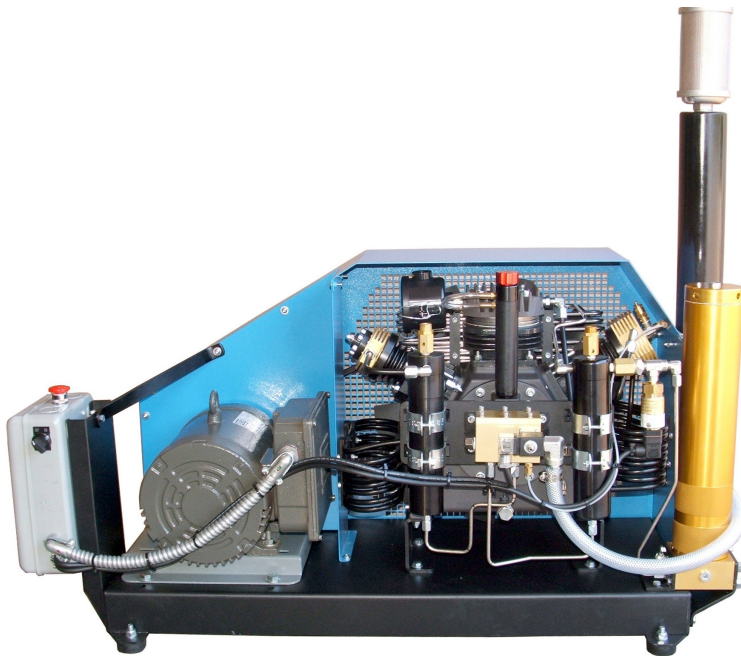

- ❖ 9 CFM
- ❖ 5000 PSI
- ❖ 7.5 HP
- ❖ 1500 RPM
- ❖ Single or Three phase electric
- ❖ 53" L x 21" W x 30" H
- ❖ 320 lbs.

SPECIFICATIONS

COMPRESSOR

The compressor block is 3 stage, air cooled, has aluminum intercoolers and stainless steel aftercooler, a aerodynamically designed fan to provide high velocity cooling over the compressor and relief valves on all stages. This is a very basic compressor but has many options that can be added to it to get the set up you desire. Options include a magnetic starter, a stop/start switch an hour meter, an automatic drain system and a high-pressure shut down.

PURIFICATION

A 9,800 Cu. Ft. filtration system is designed to operate at 5000-PSI working pressure with a 4:1 safety factor. The system uses a dryer bed to remove water in excess of dew point -65 degrees. (NFPA 1500 standard) Activated charcoal and a carbon monoxide catalyst remove remaining contaminants to provide CGA Grade "E" breathing air. Additional filtration capacity can be added for high volume users.

ELECTRICAL REQUIREMENTS

The compressor requires a minimum 40 Amp, 230 Volt connection for single-phase operation, and 30 AMP, 230 or 208 Volt connection for three-phase operation.

North Shore Compressor & Machine, Inc

83 Outer Drive, Silver Bay, MN 55614 (218) 226-4695 Voice (218)-226-3440 Fax
www.northshorecompressor.com, email: info@northshorecompressor.com