




NORTH SHORE COMPRESSOR & MACHINE, INC.

NORTHSHORECOMPRESSOR.COM

83 Outer Drive
Silver Bay, Minnesota 55614
(218) 226-4695
(800) 526-6395
Fax (218)226-3440
info@northshorecompressor.com



E3-5-A AIR COMPRESSOR
(PICTURED)

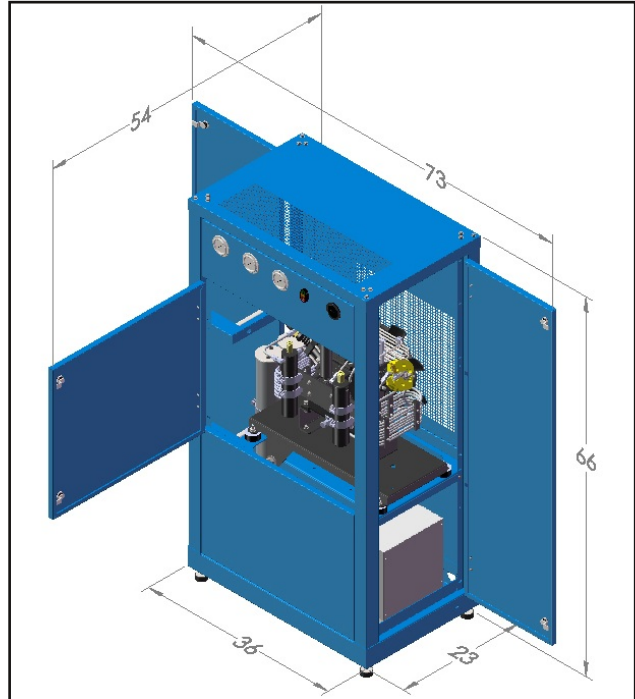

MODEL	PSI	CFM	HP	STAGES	RPM	POWER SUPPLY	WEIGHT
E3-5-A	5000	6.5	5	3	1100	SINGLE OR 3-PHASE	600 lbs.
E3-7.5-A	5000	9	7.5	3	1500	SINGLE OR 3-PHASE	600 lbs.
E3-5-A6	6000	5.5	5	3	1100	SINGLE OR 3-PHASE	600 lbs.
E3-7.5-A6	6000	8	7.5	3	1500	SINGLE OR 3-PHASE	600 lbs.

MADE IN THE U.S.A.



This Compressor features:

- Air cooled, 3 stage Arctic Block
- Relief valves on all stages
- Aluminium inter coolers
- Stainless steel after cooler
- High velocity, 10 bladed fan
- Liquid filled interstage gauge
- 1" Urethane faced sound suppression foam
- Double rubber vibration isolation

Options include:

- 48,000 Cu. Ft. filtration capacity
- 460v 3-phase

PURIFICATION:

24,000 Cu. Ft. at 80 degrees fahrenheit filtration system designed to provide C.G.A. grade "E" air. The system uses a dryer bed to remove water in excess of dew point -65 degrees. (NFPA 1500 standard) Activated charcoal and a carbon monoxide catalyst remove remaining contaminants to provide CGA Grade "E" breathing air. Additional filtration capacity can be added for high volume users

ELECTRICAL REQUIREMENTS:

The compressor requires a minimum 40 Amp, 230 Volt connection for single-phase operation, and 30 AMP, 230 or 208 Volt connection for three-phase operation